



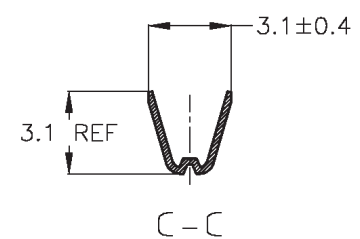
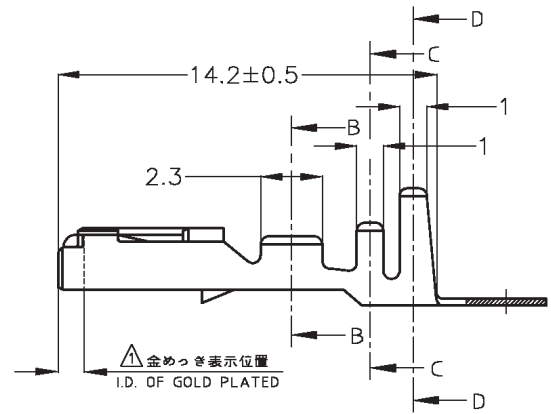

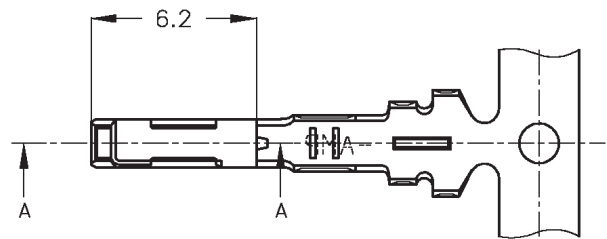


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2003 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		02	REVISED	ECR-06-026280	08NOV06	TS	KB

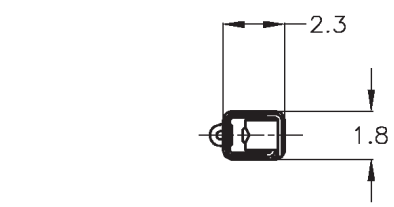

△部分金めっき
 2. 圧着規格 114-5133

△SELECTIVE GOLD
 2. CRIMP SPEC. 114-5133

△SELECTIVE GOLD 部分金めっき	175094-2
PRE-TINNED 錫めっき済	175094-1
FINISH 仕上げ	PN 型番

WIRE RANGE 0.3~0.56mm ² (AWG#22-#20)	THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN A.YAMAGUCHI 09JUL03	Tyco Electronics AMP K.K. Kawasaki, Japan
INSULATION DIA. 1.0-1.4 mm φ	DIMENSIONS: 単位: 耗 mm	CHK K.BETSUI 09JUL03	
TOLERANCE UNLESS OTHERWISE SPECIFIED: 一般公差	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD K.BETSUI 09JUL03	NAME 名称 040 SERIES RECEPTACLE CONTACT
0 ≤ x ≤ 10 : ±0.2 10 ≤ x ≤ 30 : ±0.25 30 ≤ x ≤ 100 : ±0.3 ANGLE ; ±3°		PRODUCT SPEC 製品規格 — APPLICATION SPEC 取付適用規格 SEE NOTE	SIZE A3
MATERIAL 材料 KLE-5 THICKNESS; 0.25	FINISH 仕上 SEE TABLE	WEIGHT —	CAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO 175094
		SCALE 尺度 5:1	RESTRICTED TO —
		SHEET 1 of 1	REV 02